

JLT CLAMPS

PNEUMATIC CABINET DOOR & FRAME CLAMP

#78B-CDFC-M10

Successfully clamp and square mortise & tenon or doweled face frames, single or multiple cabinet doors, furniture components, bedframes & much more.

SPECIFICATIONS:


- Two way clamping system which offers adjustable pressure on the horizontal & vertical sequences
- 48"V x 94"H maximum capacity
- Heavy-duty 100% steel frame
- Upright 60-degree vertical working angle
- Large piston-style air cylinders with flow controls provide the clamping force (requires 3-4scfm/100psi)
- Ships pre-assembled

MEASUREMENTS

Width: 120"
Height: 91"
Depth: 50"

GUARANTEED SQUARE

Every JLT Door Clamp comes pre-squared from our factory, ensuring precision.

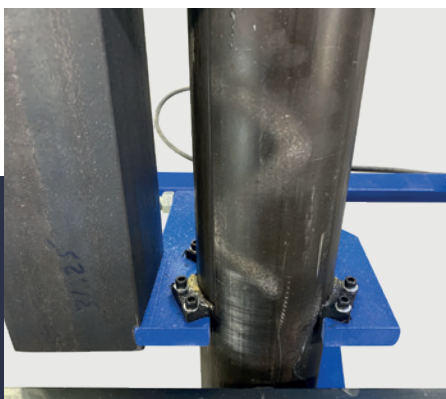

Replaceable delrin guide blocks provide smooth operation of the steel 5" wide vertical jaw plates.



The two-hand anti-tie down safety box offers hands free actuation of the clamping system.



The power setup has a 1/2HP electric motor to drive the main lead screw that controls the vertical adjustment of the upper jaws. Available voltages: 120, 220 and 440VAC/60Hz.

JAMES L. TAYLOR

JAMES L. TAYLOR MANUFACTURING

130 Salt Point Turnpike | Poughkeepsie, NY 12603 | 845-452-3780
sales@jamestaylor.com | jltclamps.com | jamestaylor.com